



SERVICE BULLETIN 282

426 Industrial Boulevard • Kearneysville WV 25430-2776 • USA

Telephone: +1 304 728-7056 • Fax: +1 304 725-6579

Toll-Free in North America: 1 800 931-9214 • technicalinquiry@royalvendors.com

Page: 1 of 4

Date: 14 Mar 07

Revision: 00

SUBJECT: RVV NG Changer Guard Kit Installation

MODELS: RVV NG with T-handle Lock

Number of
People
Required



KIT NUMBER

KIT DESCRIPTION

356128

Changer Guard Kit RVV NG

TOOLS REQUIRED: Drill with 1/4" bit, 5/8" wrench, 11/32" socket

ESTIMATED INSTALLATION TIME: 10 minutes

REASON FOR BULLETIN: This bulletin describes the proper procedure for installing the Changer Guard Kit, which provides protection from vandalism for the changer in the RVV NG.



The following areas of this vender contain voltage which can cause serious injury or even death: the main power cord, supplying 115-230 VAC to the evaporator, EMI filter, and refrigeration system; the power line from the EMI filter to the ballast and transformer; and the ballast, which can produce upwards of 600 volts. Remove power from vender before working in any of these areas.

INSTALLATION INSTRUCTIONS:

1. Remove power by unplugging the vender's power cord from the AC voltage source (wall outlet).
2. Remove the cash box from the vender. Also, remove the rubber grommet and washer from the T-handle stud.
3. Using a 1/4" bit, drill two holes in the top of the coin box housing in the positions shown in Figure 1.
4. Install the cash box lock into the changer guard door assembly as shown in Figure 2. To install the lock, remove the nut and the locking tab from the lock assembly. Then, insert the lock in the hole in the changer guard door.. Next, re-install the locking tab, and secure it with the nut. Tighten the nut with a 5/8" wrench.
5. Place the changer guard door assembly into position in the vender, as shown in Figure 3.
6. Place the mounting plate back into position, inserting the threadstuds through the holes that were drilled and also through the holes in the changer guard door assembly.
7. Secure the threadstuds with the two Keps nuts provided in the kit. Tighten them with a 11/32" wrench.
8. Close the door assembly as shown in Figure 4. Secure the door assembly by turning the lock so that it catches the T-handle brace.
9. Re-install the cash box, the rubber grommet, and the washer that were removed in Step 2.
10. Restore power to the vender by plugging the vender's power cord into the AC voltage source (wall outlet).

In an effort to provide our customers with the latest information on our equipment, Royal Vendors sends service bulletins to customers using the original ship-to address or e-mail addresses, if supplied by our customers. We also post all service bulletins on our website at www.royalvendors.com. If for any reason a vender is moved to another location or is sold to another customer other than to whom Royal Vendors originally sent the machine, it is the responsibility of the original purchaser of the vender to notify the appropriate personnel of the service bulletin.

**ANY QUESTIONS? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
IN NORTH AMERICA, CALL TOLL FREE 1 800 931-9214**



SERVICE BULLETIN 282

426 Industrial Boulevard • Kearneysville WV 25430-2776 • USA

Telephone: +1 304 728-7056 • Fax: +1 304 725-6579

Toll-Free in North America: 1 800 931-9214 • technicalinquiry@royalvendors.com

Page: 2 of 4

Date: 14 Mar 07

Revision: 00

SUBJECT: RVV NG Changer Guard Kit Installation

MODELS: RVV NG with T-handle Lock

Figure 1

Top of cash box housing

Using a 1/4" bit, drill two holes in the positions shown.


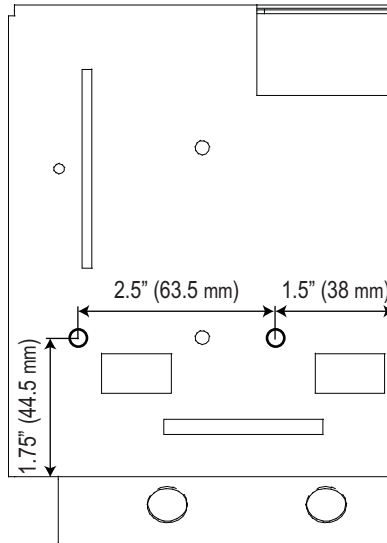


Figure 2

Lock installation

Insert the lock into the hole shown, as described in Step 4.

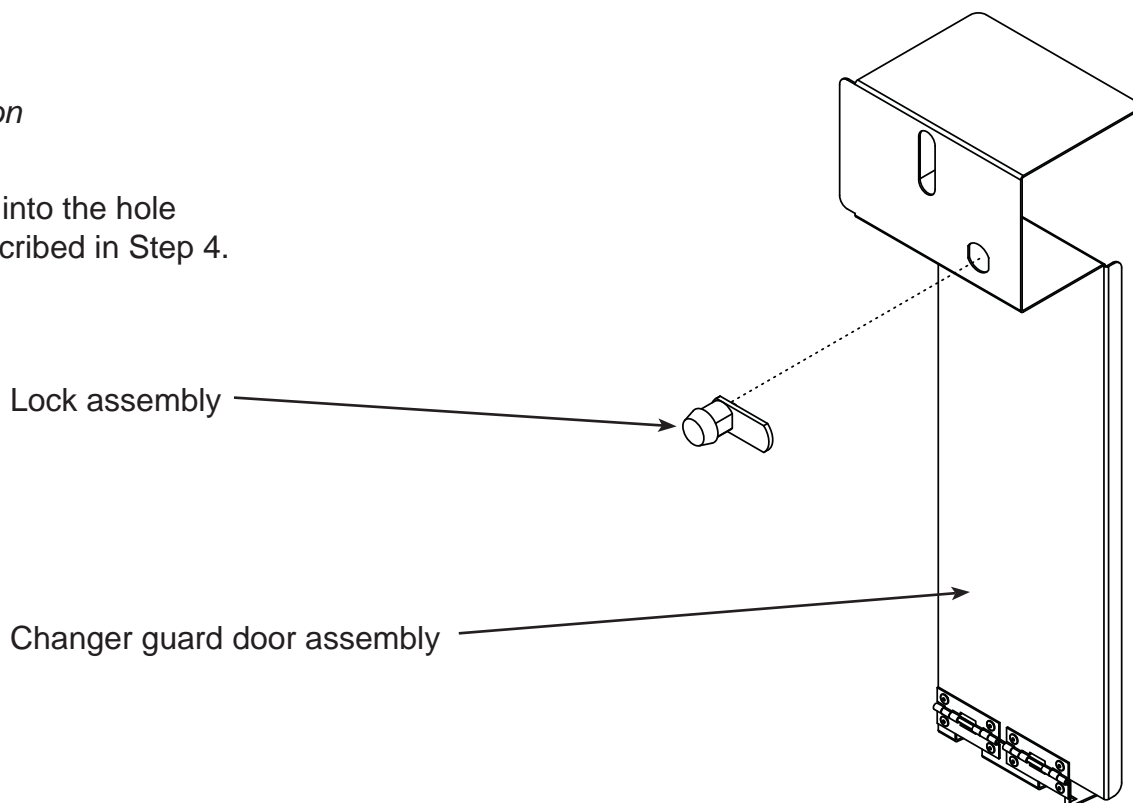

**ANY QUESTIONS? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
IN NORTH AMERICA, CALL TOLL FREE 1 800 931-9214**



SERVICE BULLETIN 282

426 Industrial Boulevard • Kearneysville WV 25430-2776 • USA

Telephone: +1 304 728-7056 • Fax: +1 304 725-6579

Toll-Free in North America: 1 800 931-9214 • technicalinquiry@royalvendors.com

Page: 3 of 4

Date: 14 Mar 07

Revision: 00


SUBJECT: RVV NG Changer Guard Kit Installation

MODELS: RVV NG with T-handle Lock

Figure 3

Installing the assembly

Insert the changer guard mounting plate through the holes that were drilled in the coin box housing and through the holes in bottom of the changer guard door assembly. Secure the assembly with the nuts provided in the kit. Tighten the nuts with a 11/32" socket.

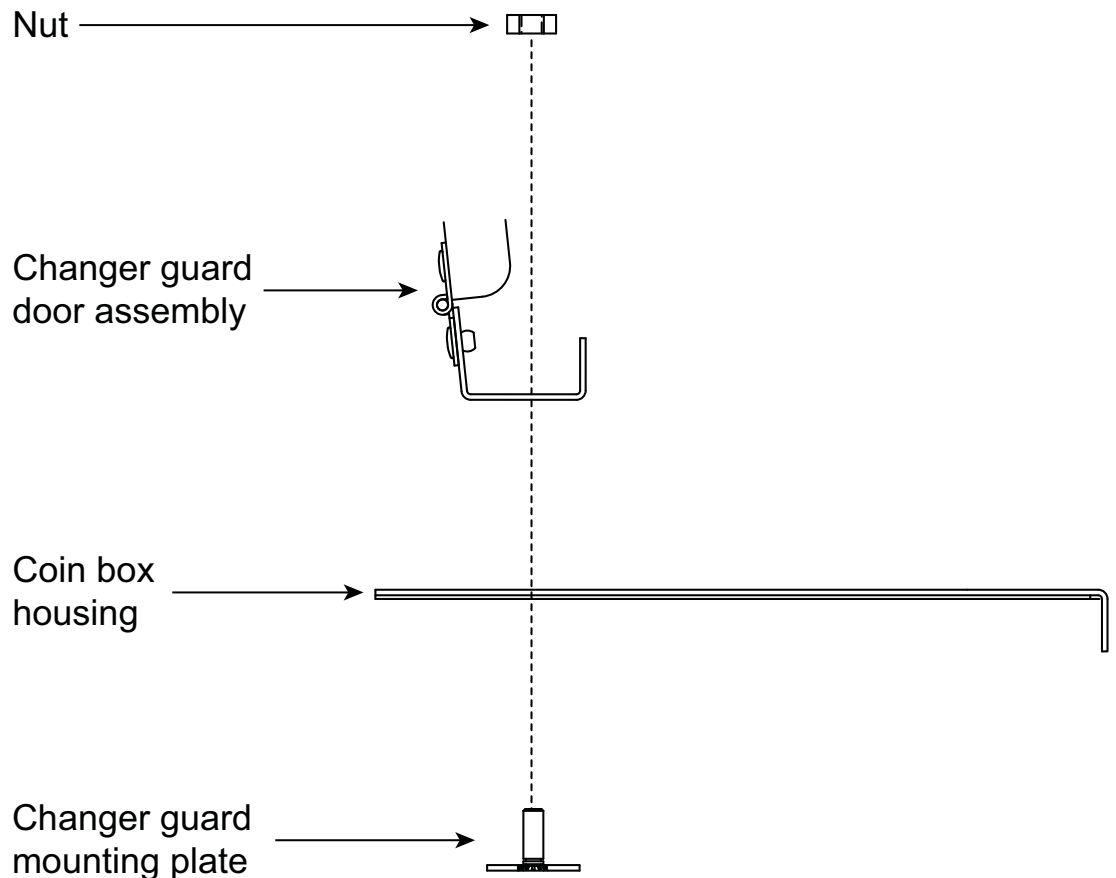

**ANY QUESTIONS? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
IN NORTH AMERICA, CALL TOLL FREE 1 800 931-9214**



SERVICE BULLETIN 282

426 Industrial Boulevard • Kearneysville WV 25430-2776 • USA

Telephone: +1 304 728-7056 • Fax: +1 304 725-6579

Toll-Free in North America: 1 800 931-9214 • technicalinquiry@royalvendors.com

Page: 4 of 4

Date: 14 Mar 07


Revision: 00

SUBJECT: RVV NG Changer Guard Kit Installation

MODELS: RVV NG with T-handle Lock

Figure 4

Assembly installed in door, shown in closed position, with coin box reinstalled.

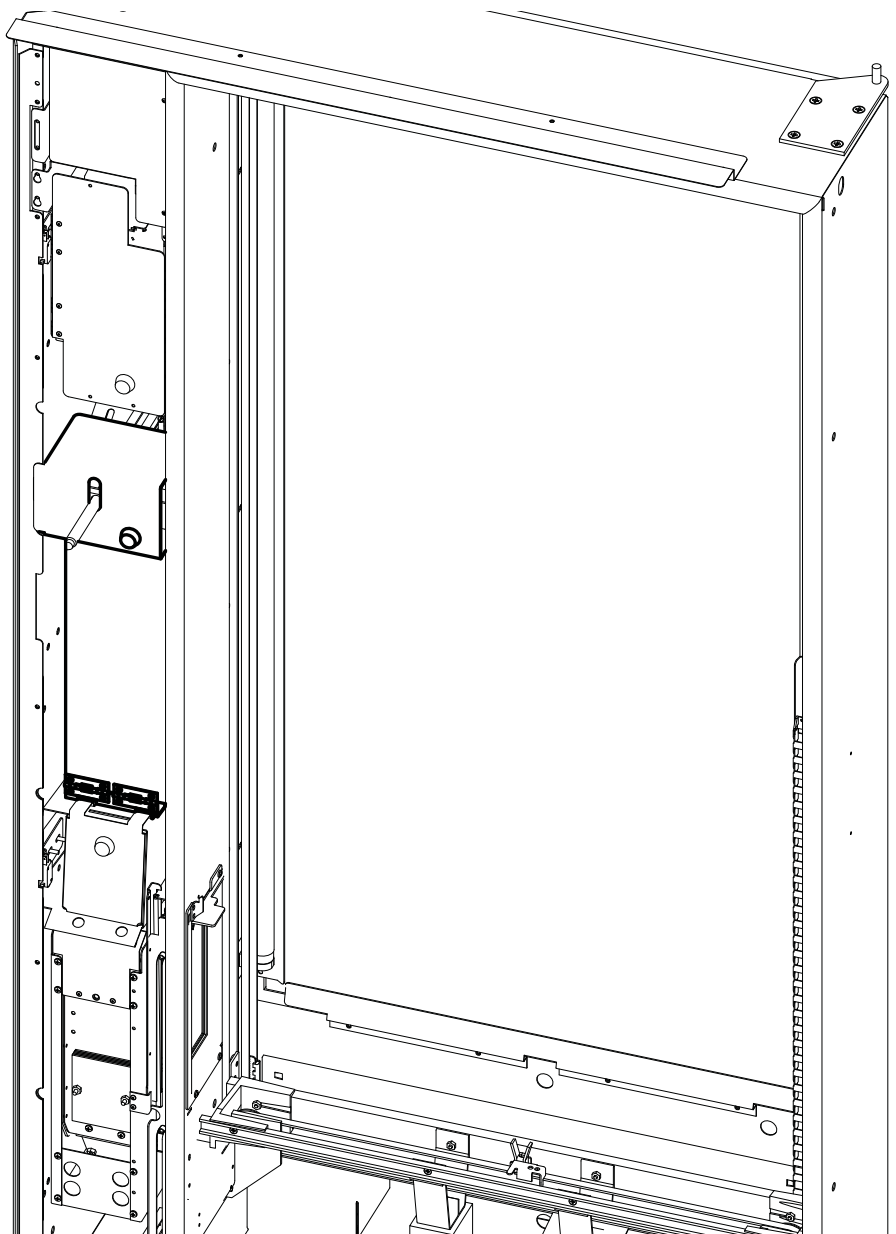

**ANY QUESTIONS? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
IN NORTH AMERICA, CALL TOLL FREE 1 800 931-9214**