



SERVICE BULLETIN # 00124

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 8-18-00

REVISION: 03

SUBJECT: Installation of Patch Plate Kit - DP

MODELS: Dr. Pepper Venders

KIT NUMBER

KIT DESCRIPTION


100140

Patch Plate Kit (Dr. Pepper)

BEFORE WORKING ON VENDER: Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).

Instructions:

1. Depending on the amount of damage, either all or parts of the damaged area may need to be removed to allow the validator and/or coin insert to be installed properly.
2. If the threadstud located on the control panel is still useable, it will be necessary to remove the stud from the patch plate.
3. Align the existing lock cover holes in the control panel with the holes in the patch plate and secure by using (2) carriage bolts and keps nuts.
4. Using the patch plate as a guide, drill (7) 9/32" dia. holes into the control panel and secure the patch plate with an additional (7) carriage bolts and keps nuts.

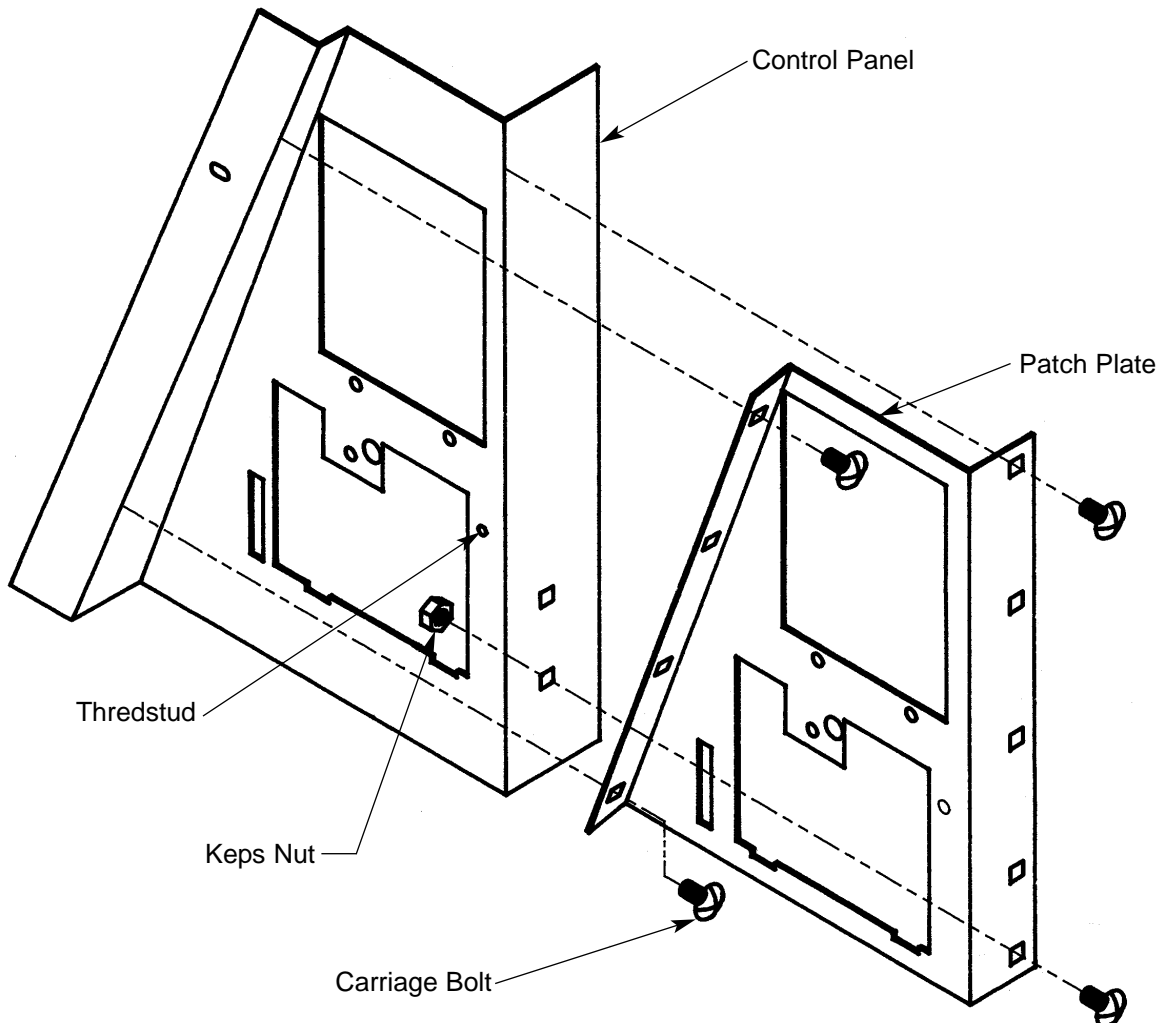

ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214