



# SERVICE BULLETIN # 00163

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 6-20-02

REVISION: 03

**SUBJECT:** Installation of a Debit Card Reader for the Marketing Vender

**MODELS:** GIII Marketing Vender

KIT NUMBER	KIT DESCRIPTION
290106	Debit Card Reader Kit (Marketing Vender)



The following areas of this vender contain voltage, which can cause serious injury or even death. The main power cord, supplying 110 VAC to the evaporator, EMI filter, and refrigeration system. The power line from the EMI filter to the ballast and transformer. The ballast can produce upwards of 600 volts. Remove power from vender before working in any of these areas.

## Instructions:

### Installing the debit card reader in the 13th select button position of the marketing vender:

1. Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).
2. Take all four 11/32 nuts off the back of the 13th select button brackets.
3. Unplug the select harness from the selection switch.
4. Remove both select button brackets, then remove the 13th select button.
5. Remove the select button plate from the front of the door.
6. Install the debit card plate (290,104,004) with the four 11/32 nuts from the select button brackets.
7. Install the debit card reader with four additional 11/32 nuts that are supplied with the debit card reader.
8. Plug the debit card harness from the debit card reader into the serial changer harness.


**Note:** A special harness is required if used in conjunction with a bill validator. This harness is supplied by the debit card manufacturer.

### Installing the debit card reader in the validator position of the marketing vender:

1. Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).
2. Remove the validator, then remove the validator mounting plate (remove all four 11/32 nuts).
3. Install the debit card plate (290,104,004) with the four 11/32 nuts from the validator plate.
4. Install the debit card reader with four additional 11/32 nuts that are supplied with the debit card reader.
5. Plug the debit card harness from the debit card reader into the serial changer harness.

**Note:** The Debit Card plate can be used for both validator position and 13th select button position.

Rear view of the Marketing Door (Select Panel)

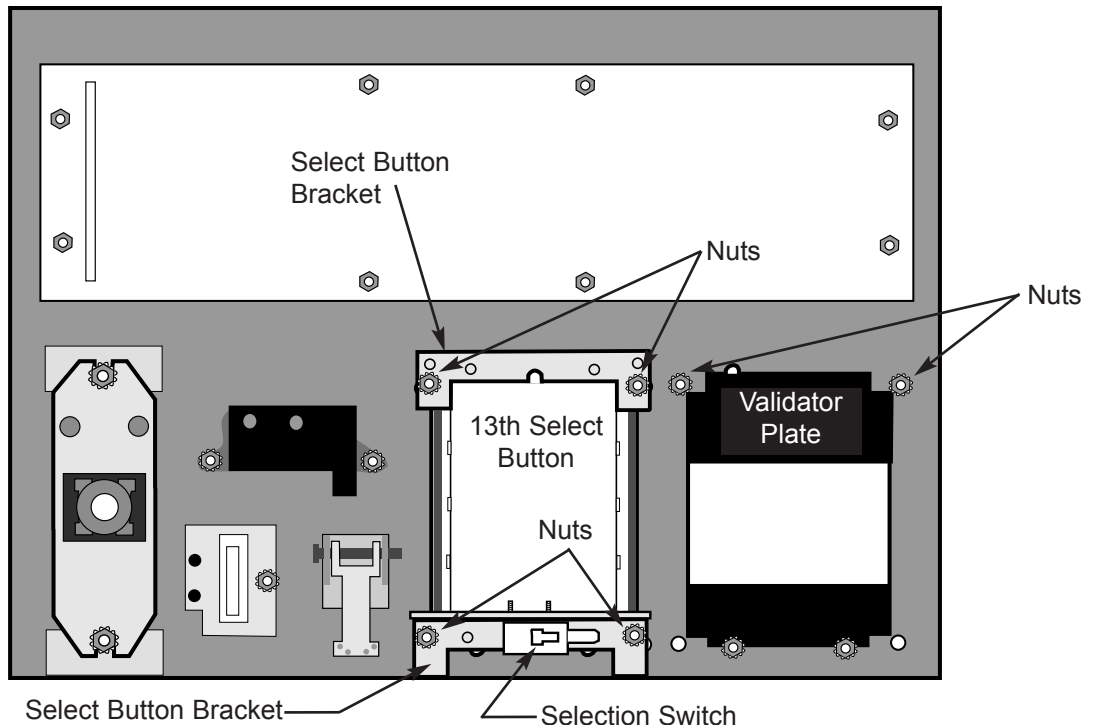

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT  
CALL TOLL FREE (800) 931-9214**