



Helpful Hints

clear & easy

019

426 Industrial Boulevard • Kearneysville WV 25430-2776 • USA
Telephone: +1 304 728 7056 • technicalinquiry@royalvendors.com
Toll-free in North America: 1 800 931 9214 • Fax: +1 304 725 4016
Canada: +1 905 738 5777 • Mexico: +52 55 5203 6887
Europe: +49 2158 95 1000 • Australia: +61 2 9890 5433

Page: 1 of 1

Date: 12 Sep 2011

Revision: 04

SUBJECT: Optic Sensor Adjustment for 20 Plus Venders

MODELS: 20 Plus Venders

Number of
People
Required



TOOLS REQUIRED: Small flathead screwdriver

ESTIMATED TIME: 1 minute




The following areas of this vender contain voltage which can cause serious injury or even death: the main power cord, supplying 115-230 VAC to the evaporator, EMI filter, and refrigeration system; the power line from the EMI filter to the ballast and transformer; and the ballast, which can produce upwards of 600 volts. Remove all power from the vender before working in any of these areas.

REASON FOR HELPFUL HINT: To properly adjust the optic sensor when replacing a control board in a 20 Plus Vender.

INSTRUCTIONS:

1. Unplug optic sensor harness from the control board (P14).
2. Adjust the set screw (on the control board) clockwise until the indicator light becomes solid. Once the light becomes solid, continue two full turns clockwise.
3. Plug optic sensor harness to the control board (P14).
Note: After the optic sensor harness is plugged in, the indicator light on the control board will go out and the indicator light on the optic sensor board will come on.
4. Test adjustment by passing your hand across the path of the two optical sensors in the cabinet. Watch for the indicator light on the control board (LED1) to blink when the path is broken.

CAUTION: If the optic sensor harness is plugged up to the wrong pin position (P2 which is for the LED), the optic sensor board will become inoperable.

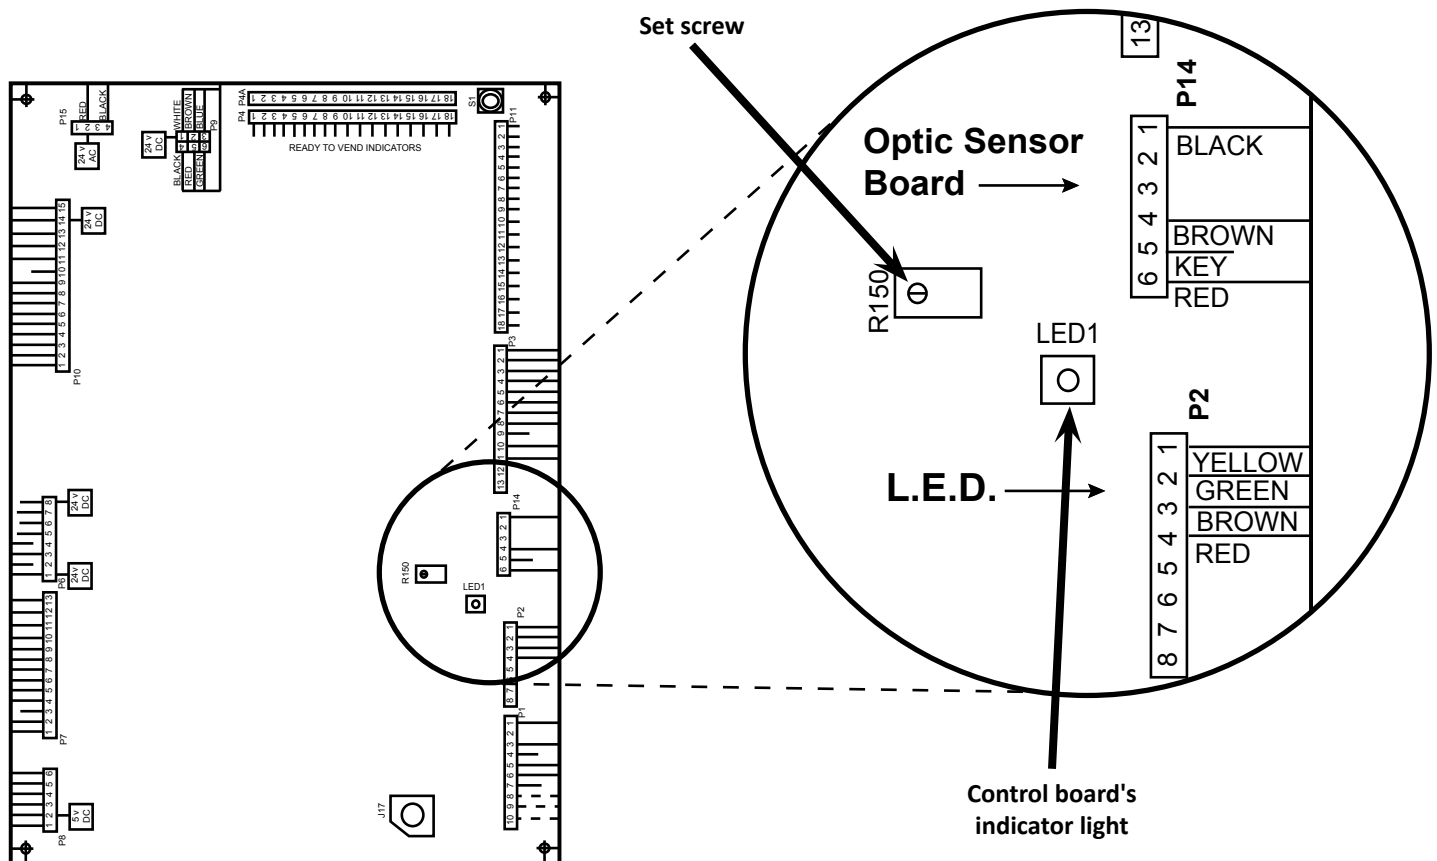

**ANY QUESTIONS? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
IN NORTH AMERICA, CALL TOLL FREE 1 800 931 9214**