



SERVICE BULLETIN # 00215

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 2-28-02

REVISION: 03

SUBJECT: Vandal-Panel Channel Installation

MODELS: All Venders


KIT NUMBER	KIT DESCRIPTION
282103	Vandal-Panel Channel Kit - 72" (BLACK)
281103	Vandal-Panel Channel Kit - 79" (BLACK)
291299	Vandal-Panel Channel Kit - 72" (RED)
290299	Vandal-Panel Channel Kit - 79" (RED)

REASON FOR BULLETIN:

Adds additional security to prevent vandals from prying open the vender from the T-handle side, by allowing the outside door vandal panel to slide inside the vandal-panel channel, which removes the "prying" points.

INSTRUCTIONS:

1. Remove power from vender by unplugging vender's main power cord from the AC voltage power source.
2. Open Main Door.
3. Place the Vandal-Panel Channel against the Cabinet with the 90 degree break at the top of the cabinet.
4. Secure Vandal-Panel Channel against cabinet with Tape.
5. Drill .257-.261 pilot holes (about 1/8" deep) to the corresponding holes in the Vandal-Panel Channel.
6. Fasten the Vandal-Panel Channel with the 1/4" (.25) Steel Rivets from the kit.
7. Remove tape.

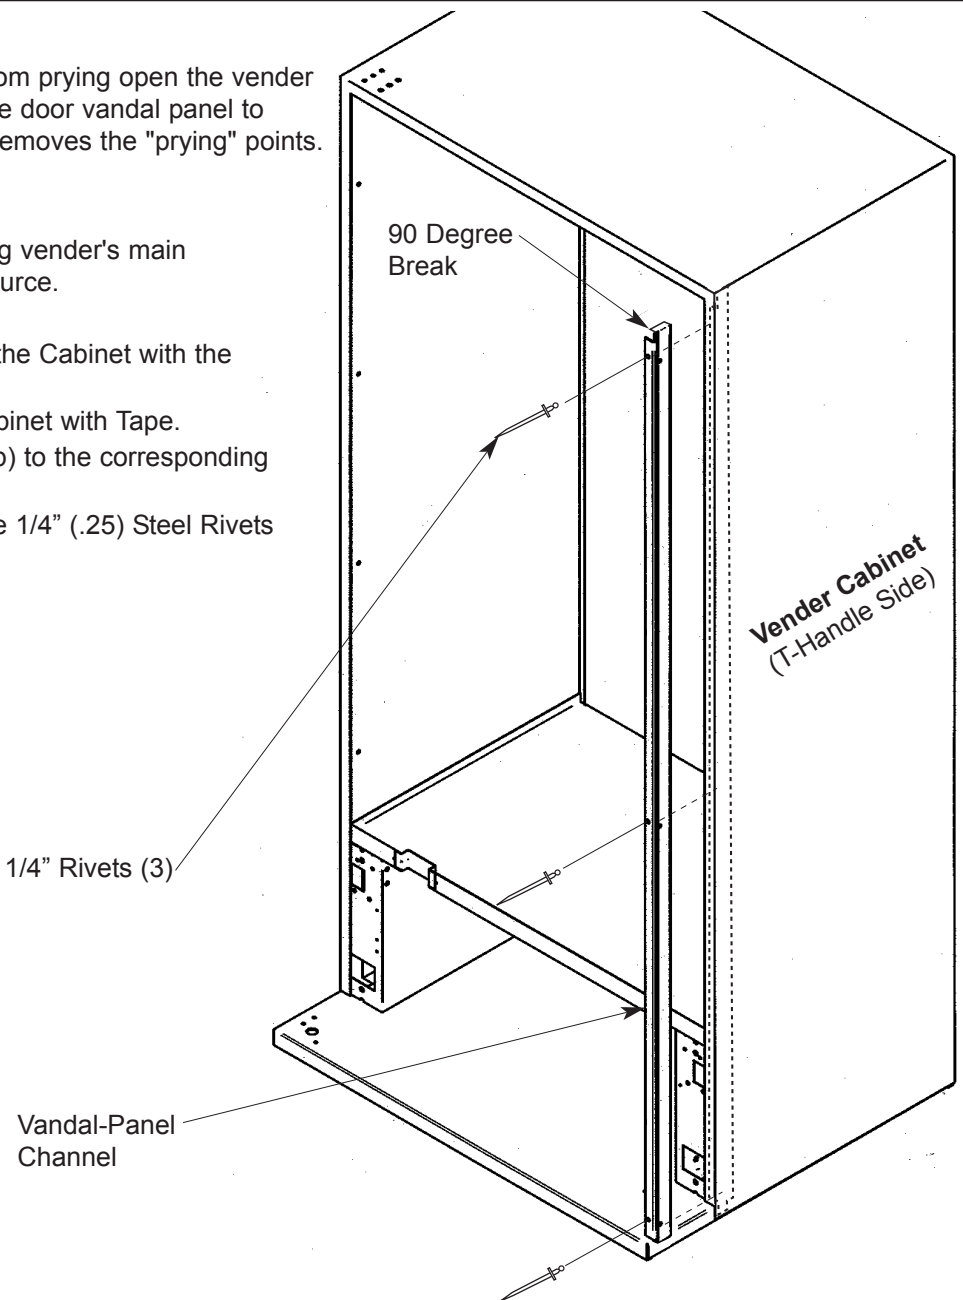

ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214