



SERVICE BULLETIN # 00030

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 6-19-02

REVISION: 06

SUBJECT: Installation of Vend Counter Kit

MODELS: Merlin 2000 Rev. 1.xx boards

of People
Required



KIT NUMBER

KIT DESCRIPTION

010193

Merlin 2000 Vend Counter Kit


TOOLS REQUIRED: Phillips screwdriver

ESTIMATED TIME: 5 minutes

BEFORE WORKING ON VENDER: Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).



The following areas of this vender contain voltage, which can cause serious injury or even death. The main power cord, supplying 110 VAC to the evaporator, EMI filter, and refrigeration system. The power line from the EMI filter to the ballast and transformer. The ballast can produce upwards of 600 volts. Remove power from vender before working in any of these areas.

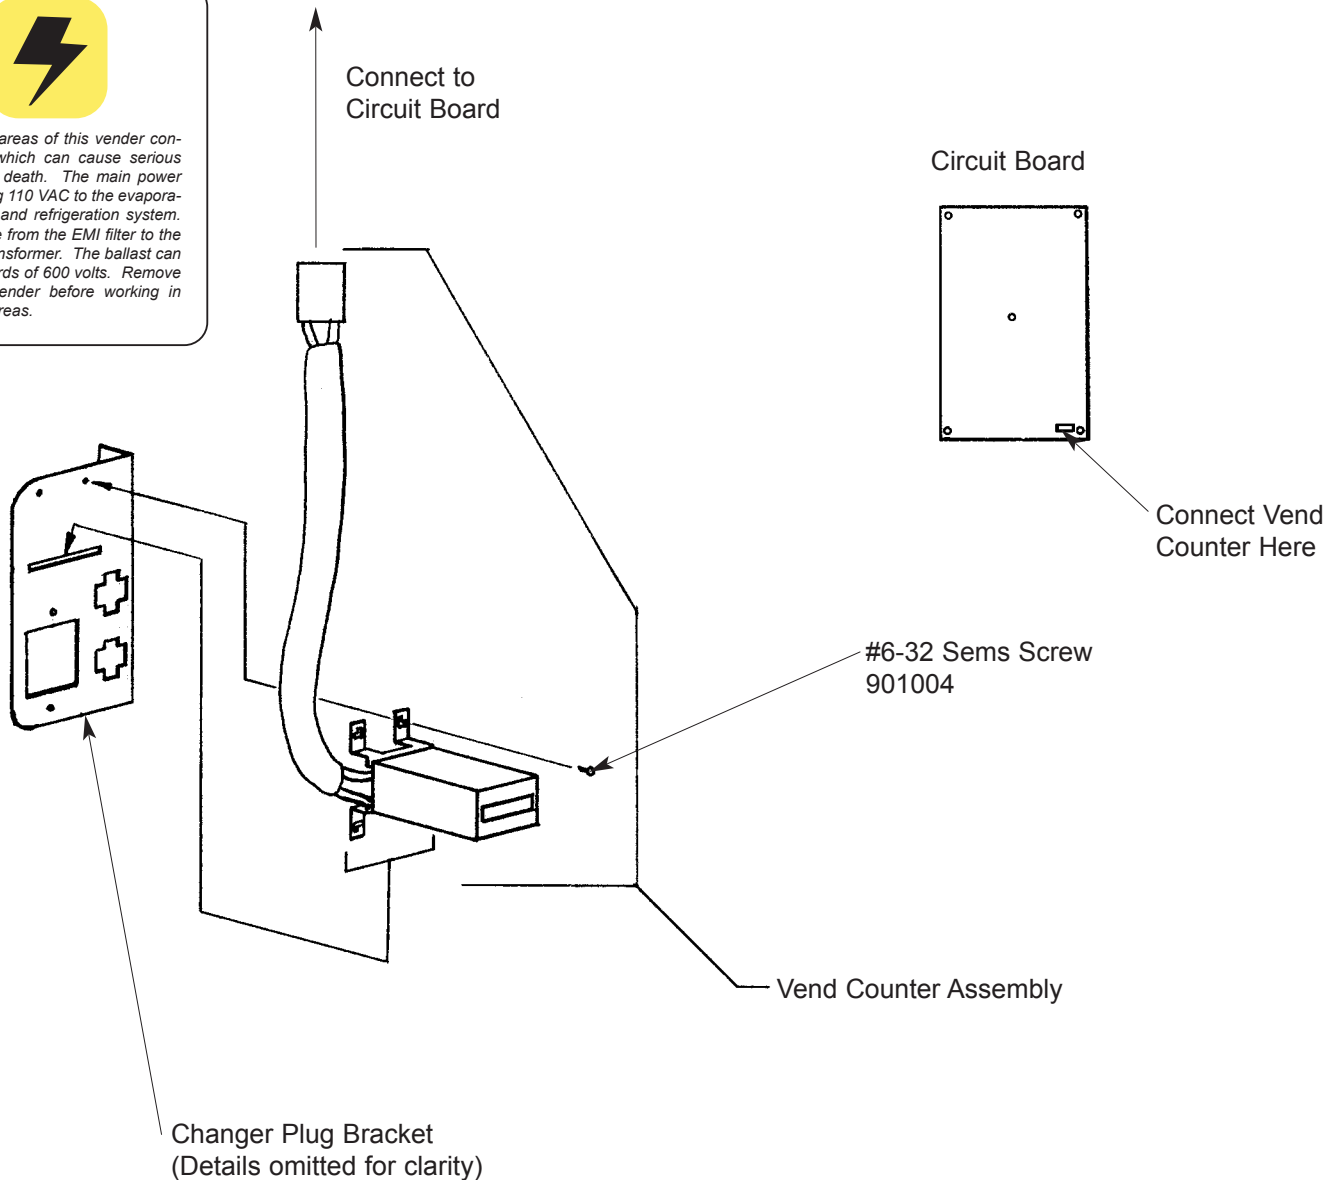

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214**