



SERVICE BULLETIN # 00042

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430
 Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214


PAGE: 1 of 1
DATE: 8-17-00
REVISION: 02

SUBJECT: Coke Reset with Sequencing for Forced Purchased (No Escrow)	
MODELS: Merlin 2000 (Coca-Cola)	
KIT NUMBER	KIT DESCRIPTION
010187	Coke Reset with Sequencing for Forced Purchased Kit

BEFORE WORKING ON VENDER: Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).

INSTRUCTIONS:

1. Find the 12-way white select panel plug on the control board and unplug it.
2. Plug the jumper wire switch assembly into this position.
3. Depress the mode switch, and then depress the .25 payout switch and the LED display should read **OPT** for the option mode.
4. Toggle the jumper wire switch and the display will read **ON** or **OFF**. **ON** is for forced purchase, and **OFF** is for full escrow.
5. Remove the jumper wire switch assembly and replace the select panel harness.

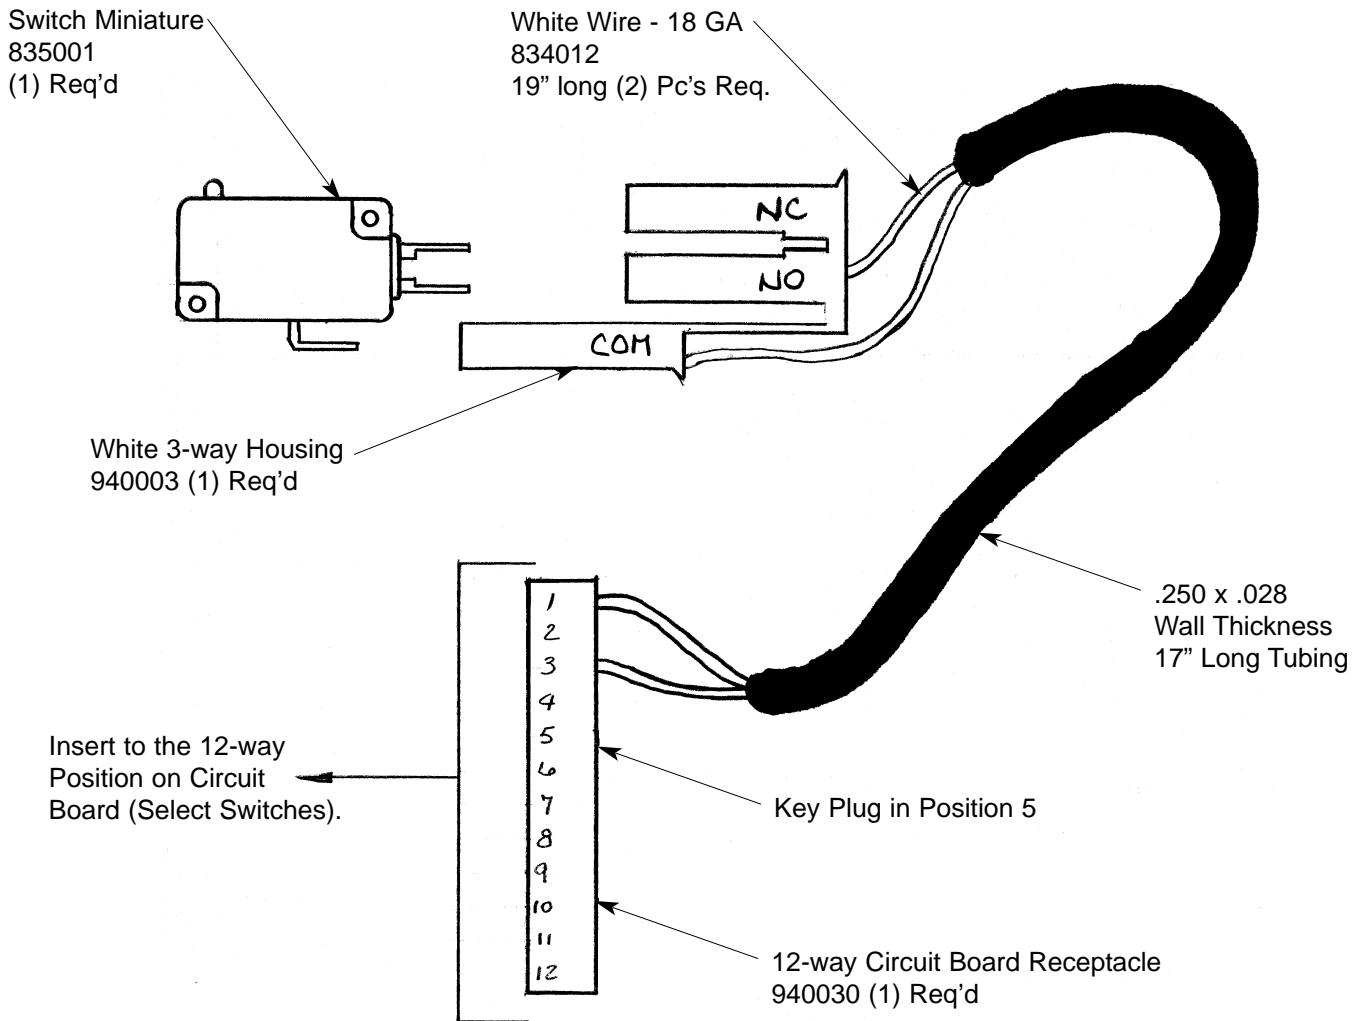

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
 CALL TOLL FREE (800) 931-9214**