



SERVICE BULLETIN # 00093

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 7-7-99

REVISION: 01

SUBJECT: Converting Merlin From English To French Language

MODELS: Merlin 2000 Venders with Control Board Revision 5.09C and Above

KIT NUMBER


KIT DESCRIPTION

011191

English to French Language Conversion (Merlin 2000)

Instructions:

1. Turn power off to vender.
2. Remove circuit board cover and locate option receptacle on control board.
3. Remove option receptacle from board. Push tubing surrounding wires back into main harness tubing. Locate wire EV50. Cut wire EV50 approximately 3 1/2" from receptacle. Strip both ends cut approximately 5/16". Using supplied wire EV50 and wire nut (940,057,011) supplied with kit, splice all (3) wires together.
4. Insert terminal side of supplied EV50 wire into position 4 of option receptacle.
5. Slide tubing back into position.

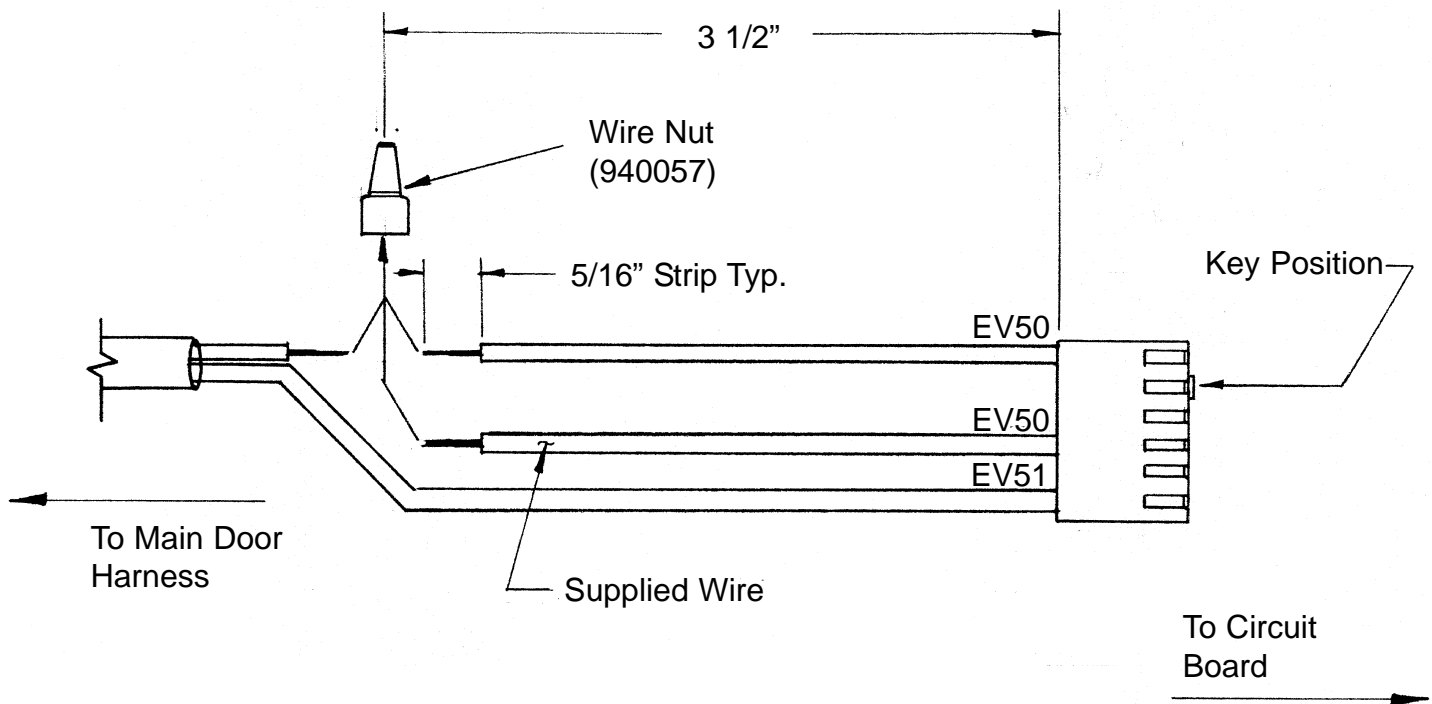

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214**