



SERVICE BULLETIN # 00183

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430

Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 8-22-00

REVISION: 01

SUBJECT: Installation of P.O.S. Security Channel

MODELS: GIII Landscape Venders

KIT NUMBER


KIT DESCRIPTION

231117

P.O.S. Security Channel Kit

Instructions:

1. Remove power from vender by unplugging vender's main power cord from the AC voltage power source (wall outlet).
2. Remove Validator if present (4 nuts and harness).
3. Remove the current P.O.S. window plate (2 screws)
4. Remove the 3 nuts and carriage bolts on the left side of the door. (Only 1 bolt and nut on 79" venders)
5. Place the New P.O.S. Security Channel into place
6. Secure the nut(s) and carriage bolt(s) on the left side of the door that were just removed.
7. Secure the top screws of the P.O.S. Security Channel.
8. Drill the supplied cutting screws through the holes on the far right of the P.O.S. Security Channel and through the door frame.
9. Reinstall Validator if present (4 nuts and harness).

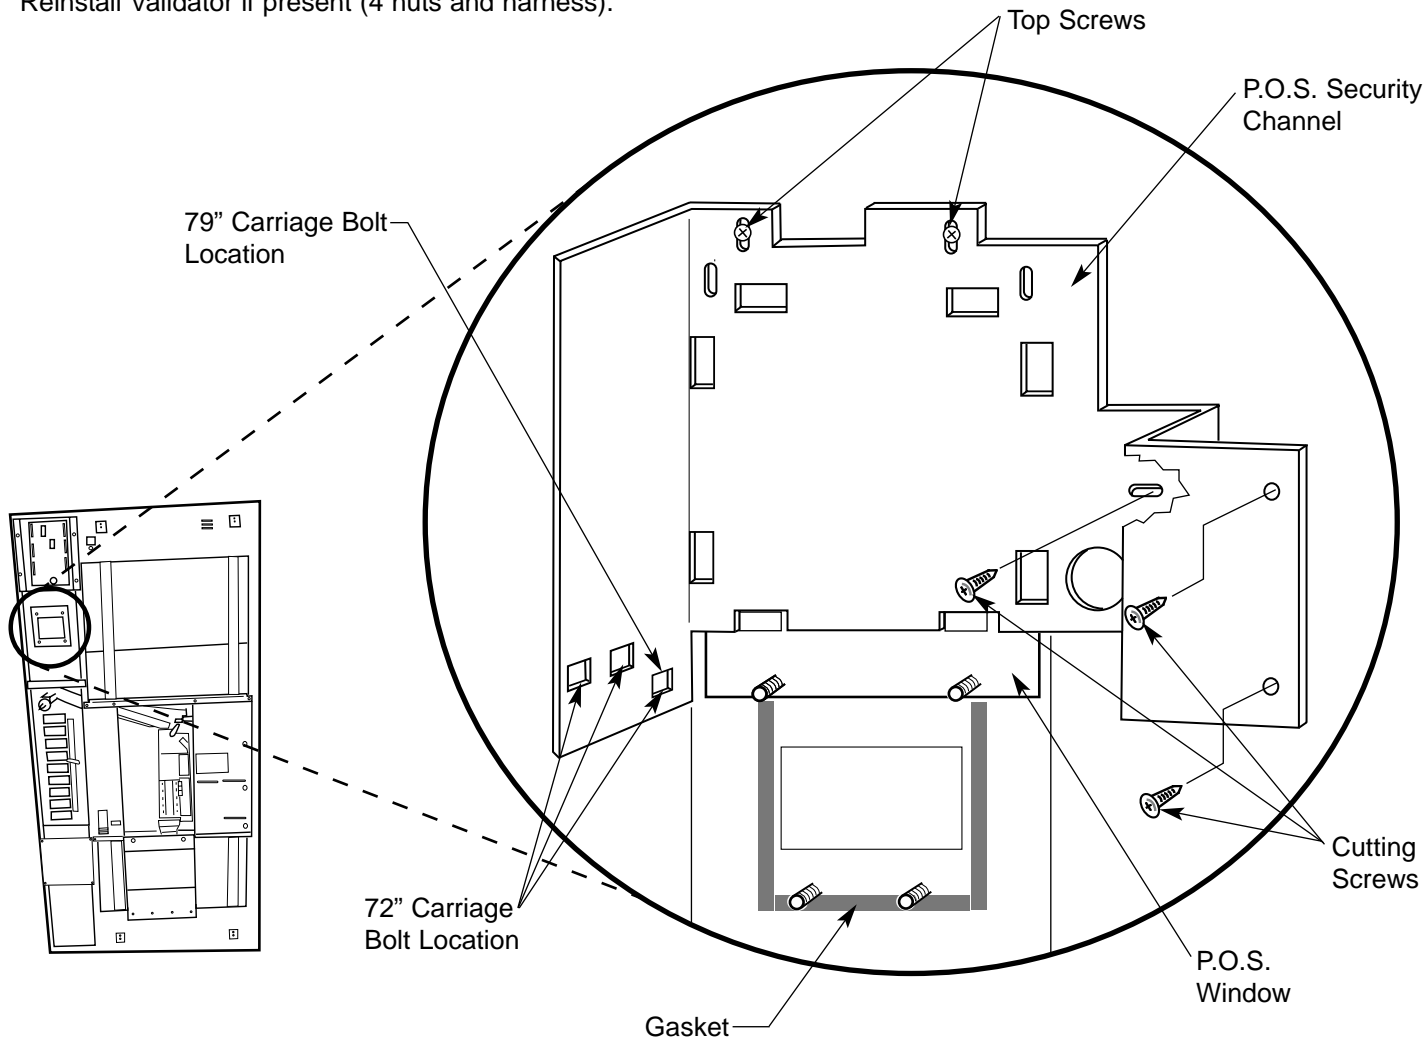

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214**